

TECHNICAL INFORMATION ***INFORMACION TECNICA***

CITIZEN QUARTZ

Cal. No. B800

Cal. No. B810



(Cal. No. B810)

 **CITIZEN**

CITIZEN IS A REGISTERED TRADEMARK OF CITIZEN WATCH CO., JAPAN.

Contents

§1. OUTLINE	1
§2. SPECIFICATIONS	1
§3. HANDLING OF WATCH	2
A. Solar Power Watch	2
B. Setting the Time and Calendar	2
C. Functions of the Sollar Power Watch	3
D. Time Required for Recharge	4
E. In These Cases	5
F. Care for handling of Charge	6
G. Replacing the Secondary Battery	6
§4. PRECAUTIONS FOR DISASSEMBLY AND ASSEMBLY	7
A. How to Pull Out Setting Stem from One-piece Case	7
B. Precautions for Removal and Setting of Solar Cell	8
§5. DISASSEMBLY AND ASSEMBLY OF MOVEMENT (Cal. B800)	9
§6. DISASSEMBLY AND ASSEMBLY OF MOVEMENT (Cal. B810)	11
§7. TROUBLESHOOTING AND ADJUSTMENT	13

Índice

§1. DESCRIPCION GENERAL	17
§2. ESPECIFICACIONES	17
§3. MANEJO DEL RELOJ	18
A. Reloj de energía solar	18
B. Ajuste de la hora	18
C. Función del reloj de energía solar	19
D. Tiempo requerido para la recarga	20
E. En estos casos	21
F. Cuidados para el manejo de la carga	22
G. Cambio de la pila secundaria	22
§4. PRECAUCIONES PARA EL DESMONTAJE Y MONTAJE	23
A. Forma de extraer el vástago de ajuste de una caja monopieza	23
B. Precauciones para la extracción y la colocación de la batería solar	24
§5. DESMONTAJE Y MONTAJE DEL MECANISMO (Cal. B800)	25
§6. DESMONTAJE Y MONTAJE DEL MECANISMO (Cal. B810)	27
§7. METODO DE INSPECCION Y DE AJUSTE DEL MECANISMO	29

§1. OUTLINE

This watch is a ladie's solar power watch which has a solar cell on its dial that converts the light energy into electrical energy to drive its mechanism.

§2. SPECIFICATIONS

Caliber NO.		B800	B810
Type		Analog solar power watch (Three hands)	
Movement size (mm)		ø28.2 x 3.8t	ø30.4 x 3.57t
Accuracy (At normal temperature)		±15 sec/month (+5°C~+35°C/41°F~104°F)	
IC		1 unit of C/MOS-LSI	
Operating temperature		-10°C~+60°C (14°F~140°F)	
Converter		Bipolar step motor	
Time adjustment		No adjustment terminal for use in market	
Measurement gate		10 sec.	
Additional functions	Date (With quick setting mechanism)	Installed	
	Day (With quick setting mechanism)	Installed	Not installed
	Quick start	Installed	
	Insufficient charge warning	Installed	
	Time setting warning	Installed	
Continuous operating time	From full recharge to stop	Approx. 6 month	
	From two second interval movement to stop	Approx. 3 days	
Secondary battery	Part NO.	295-40	
	Remarks	Secondary battery block (With welded lead plate)	

§3. HANDLING OF WATCH

A. Solar Power Watch

This watch is powered not by an ordinary battery, but by converting light energy into electrical energy.


A secondary battery is used in this watch to store electrical energy. **This secondary battery is a clean energy battery which doesn't use any toxic substances such as mercury. Once fully charged, the watch will continue to run for about 6 months without further charging.**

To use this watch comfortably, **make sure that the watch is always recharged before it finally stops.**

There is no concern for over-charging this watch. (Over-Charging Prevention Function is included)

Explain the user to expose the dial (solar cell) of this watch to light as long as possible.

B. Setting the Time and Calendar

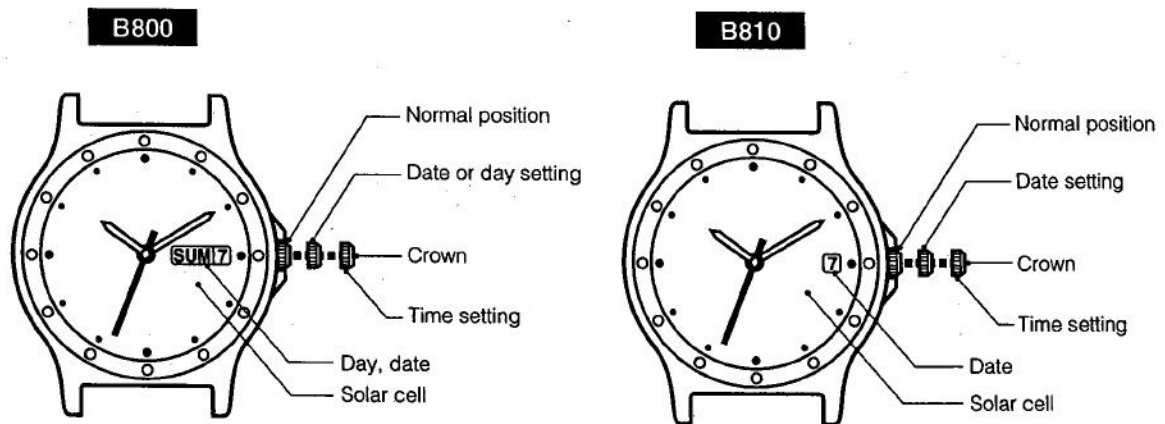

■ Setting the time

- (1) Stop the second hand at the 0 second position by pulling the crown out to the 2nd click.
- (2) Turn the crown to set the time.
- (3) After setting the time, firmly push the crown back in to its normal position.

* The date changes about 0:00 a.m. When setting the time, take care of a.m. and p.m.

■ Setting the calendar

- (1) Pull the crown out to the 1st click.
- (2) Set the desired date by turning the crown to the left (counter clock wise).
- (3) Set the desired day by turning the crown to the right (clock wise).
 - * For watches equipped with date display only, nothing happens when the crown is turned to the right.
- (4) After you have set the calendar, be sure to firmly return the crown to its normal position.


* Do not set the calendar while the hands are indicating the following time zones.

- Watches equipped with date display: 9:00 p.m. – 1:00 a.m.
- Watches equipped with date and day display: 9:00 p.m. – About 4:00 a.m.


If the calendar is set in these time zones, it may not change even on the next day.

C. Functions of the Solar Power Watch

If the charge becomes insufficient, a warning function will operate and the display changes, as below.

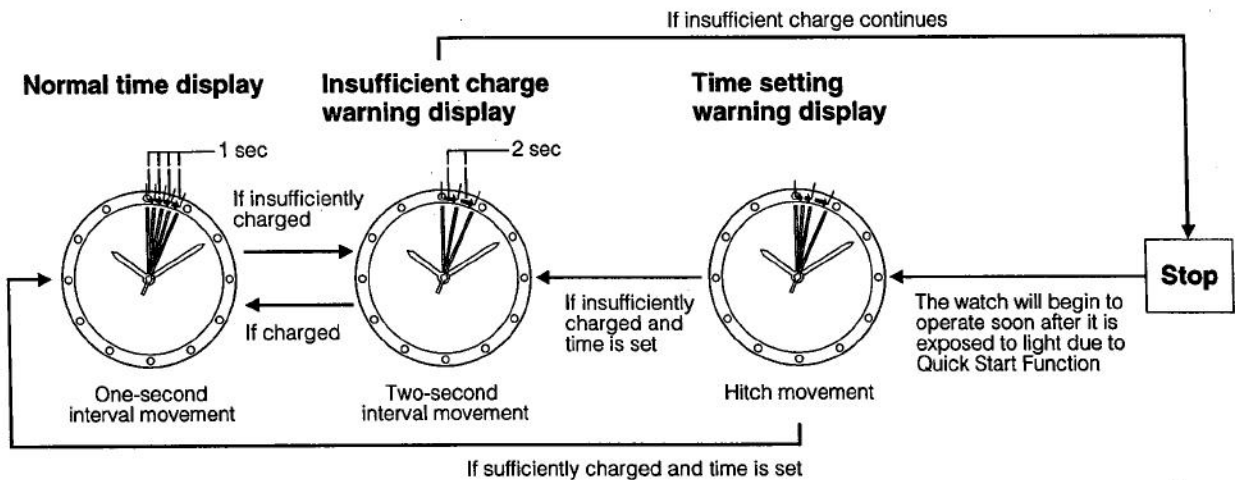

■ Insufficient Charge Warning Function

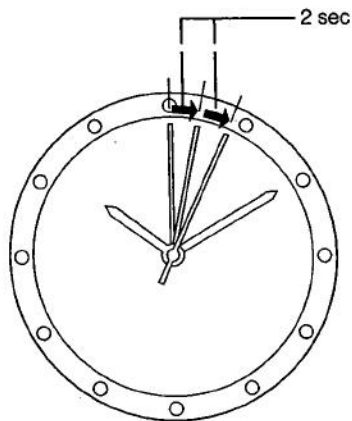

Two-second interval movement

The second hand changes to two-second interval movement to indicate insufficient recharging.

Even in such a case, the watch keeps correct time, but about 3 days after two-second interval movement begins, the watch will stop.

After exposing the watch to light, recharging takes place and the watch returns to one-second interval movement.


■ Quick Start Function

The watch will stop if it is completely discharged.

It will begin to operate soon after (within 10 second) it is exposed to light.

(However, the time to start may vary according to the brightness of the light.)

■ Time Setting Warning Function

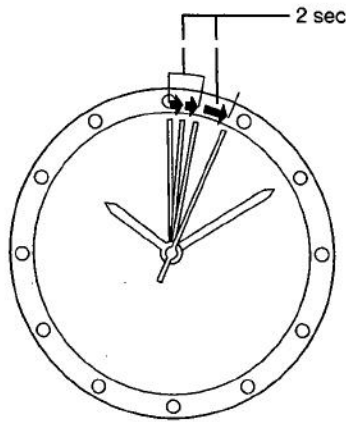

Hitch movement

If the watch stops, subsequent exposure to light allows the 'quick start' function to start again, and **the second hand moves with a hitch to indicate that the time incorrect.**

In this case, quickly recharge the watch and reset the time.

Even if the secondary battery is fully recharged, the hitch movement will continue, unless the time is reset and the crown is returned to the normal position.

■ Over-charging Prevention Function

Once the secondary battery is fully recharged, the overcharging prevention feature comes into operation and prevents over-charging.

D. Time Required for Recharge

Time required for recharge may vary according to the Caliber number, design (color of the dial, etc.) and operating environment. The following table will serve you as rough reference.

"The recharging time is the time when the watch is continuously exposed to radiation."

<Cal. B800>

Illuminance (lux)	Environment	Time required		
		From the stop state to the one second movement	One day usage	Empty to full
500	Inside an ordinary office	22 hours	1 hour 30 minutes	320 hours
1000	60-70cm (24-28in.) under a fluorescent light (30W)	11 hours	45 minutes	158 hours
3000	20cm (8in.) under a fluorescent light (30W)	3 hours 30 minutes	15 minutes	53 hours
10000	Exterior, cloudy	1 hour	5 minutes	17 hours
100000	Exterior, summer, sunny	14 minutes	2 minutes	6 hours


<Cal. B810>

Illuminance (lux)	Environment	Time required		
		From the stop state to the one second movement	One day usage	Empty to full
500	Inside an ordinary office	22 hours	1 hour 30 minutes	320 hours
1000	60-70cm (24-28in.) under a fluorescent light (30W)	11 hours	45 minutes	160 hours
3000	20cm (8in.) under a fluorescent light (30W)	3 hours 30 minutes	15 minutes	53 hours
10000	Exterior, cloudy	1 hour	5 minutes	16 hours
100000	Exterior, summer, sunny	8 minutes	1 minutes	4 hours


Full recharging timeThe time for fully recharge from stopped.
(Empty to full)

One day usageThe time required for the watch to run for one day with one second interval movement.

E. In These Cases

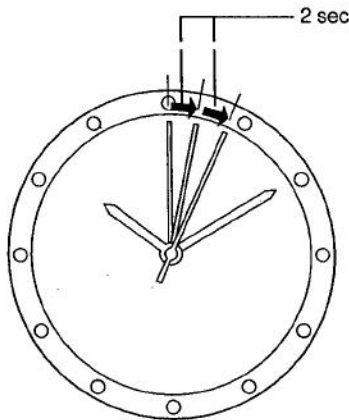

Two-second interval movement

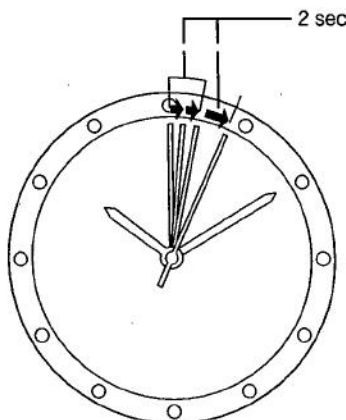

Hitch movement

[If the watch warns that the energy is running short]

The second hand starts moving at two-second increments in order to warn that the watch will stop functioning approximately after 3 days. **(Insufficient charge warning function)**

In such a case, expose the watch to light for a while to cancel the warning. (The second hand returns to the movement at one-second increments when the energy is recharged.)

If the watch is left short of energy, it will stop functioning after 3 days or so.

[If the watch warns to set the time.]

When the watch that has stopped is exposed to light, the second hand starts hitch movement. **(Quick start function)**

The time elapsed before the second hand restarts moving depends on the illuminance of the light.

After this also, the second hand keeps hitch movement to show that the watch indicates an incorrect time because it once stopped. **(Time setting warning function)**

In such a case, set the hands to the correct time.

* If the watch is insufficiently exposed to light, the second hand will soon switch to the movement at two-second increments in order to warn that the energy is running short.

F. Care for Handling of Charge

■ Notes on Use <Give the following precaution and explanation to the user.>

Take care to charge during use.

Please note that if the user wears long sleeves, the watch can easily become insufficiently charged because it is hidden and not exposed to light.

- When the user takes off the watch, it should be placed in as bright a place as possible, and it will always continue to run properly.

■ Notes on Recharge

- Avoid recharging at high temperatures (over about 60°C/140°F), otherwise the watch will be damaged during recharging.

(eg) Charging the watch near a light source that easily becomes hot, such as an incandescent lamp or a halogen lamp.

Charging in a place that easily becomes hot, such as a dashboard.

When you charge the watch by an incandescent lamp, take a distance about 50cm (20in.) from the light source to prevent extremely high temperature.

G. Replacing the Secondary Battery

This watch uses the secondary battery, which does not have to be periodically replaced due to repeated charging and discharging, unlike ordinary batteries.

Caution

Never use a battery other than the secondary battery used in this watch.

The watch structure is so designed that a different kind of battery other than the specified cannot be used to operate it. In case a different kind of battery such as a silver battery is used by some chance, there is a danger that the watch will be overcharged to burst, causing damage to the watch and even to the human body.
