

SEIKO

ANALOGUE QUARTZ
SOLAR Cal. V145
&
SOLAR DIVER'S WATCH CAL. V145

SEIKO

INSTRUCTIONS
用法説明

Printed in Japan

Copyright © 2001 by SEIKO WATCH CORPORATION

NSYV145 2001-9

Printed on recycled paper

FEATURES

- POWERED BY LIGHT ENERGY
- NO NEED FOR BATTERY CHANGE
- LASTS FOR 6 MONTHS AFTER FULL CHARGE
- ENERGY DEPLETION FOREWARNING FUNCTION
- INSTANT-START FUNCTION
- OVERCHARGING PREVENTION FUNCTION
- 200 METER WATER RESISTANCE (For Diver's Watch)
- ROTATING BEZEL (For Diver's Watch)
- SCREW DOWN CROWN (For Diver's Watch)


☆ If your watch is a diver's watch, "DIVER'S 200 M" is inscribed on the dial.
Please read the instructions pertaining to your watch.

CAUTION for Diver's Watch model

- Diving is an inherently hazardous form of recreation and it is essential that you strictly observe all instructions for use and maintenance of the watch set forth in this booklet for safety's sake. Do not attempt to dive using this watch unless you have been properly trained in diving.
- Do not use the watch for saturation diving.

DISPLAY AND CROWN OPERATION

Most Regular models

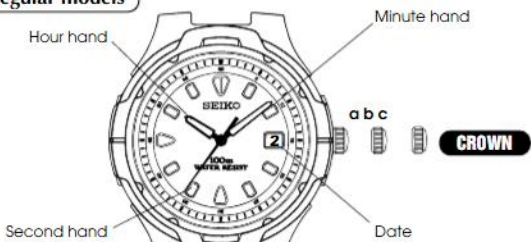


☆ The solar cell is installed under the dial.

- a) Normal position : Free
b) First click : Date setting
c) Second click : Time setting

Diver's Watch models / Some Regular models

Screw lock crown type

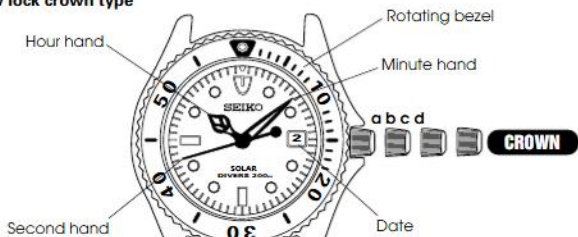


- a) Screwed-in position
b) Normal position : Free
c) First click : Date setting
d) Second click : Time setting

☆ The solar cell is installed under the dial.

TIME/CALENDAR SETTING

Most Regular models




CROWN

- 1 Pull out to first click and turn to set the previous day's date.
- 2 Pull out to second click when Second hand is at the 12 o'clock position.
- 3 Turn until the desired date appears.
- 4 Turn to set Hour and Minute hands to the desired time.
- 5 Push back in to normal position in accordance with a time signal.

Diver's Watch models / Some Regular models

Screw lock crown type



CROWN

- 1 Unscrew by turning counterclockwise.
- 2 Pull out to first click.
- 3 Turn to set the previous day's date.
- 4 Pull out to second click when Second hand is at the 12 o'clock position.
- 5 Turn until the desired date appears.
- 6 Turn to set Hour and Minute hands to the desired time.
- 7 Push back in to normal position in accordance with a time signal.
- 8 While pressing, turn clockwise to screw in completely.

NOTES:

- 1 Do not set the date between 9:00 p.m. and 1:00 a.m. Otherwise, it may not change properly.
* If it is necessary to set the date during that time period, first change the time to any time outside it, set the date and then reset the correct time.
- 2 When setting Hour hand, check that AM/PM is correctly set.
* The watch is so designed that the date changes once in 24 hours. Turn the hands past the 12 o'clock marker to determine whether the watch is set for the A.M. or P.M. period. If the date changes, the time is set for the A.M. period. If the date does not change, the time is set for the P.M. period.
- 3 When setting Minute hand, first advance it 4 to 5 minutes ahead of the desired time and then turn it back to the exact minute.
- 4 It is necessary to adjust the date at the end of February and 30-day months.

ENERGY DEPLETION FOREWARNING FUNCTION

- When the energy stored in the rechargeable battery is reduced to an extremely low level, Second hand starts moving at 2-second intervals instead of the normal 1-second intervals.
- In that case, recharge the watch as soon as possible by exposing it to light. Otherwise, the watch may stop operating in about 3 days. (For recharging the watch, see "HOW TO CHARGE AND START THE WATCH")

TO PREVENT THE ENERGY DEPLETION

- Wear the watch so that it is not covered by your clothes.
- When the watch is not in use, leave it in a bright place as long as possible.
* Make sure that the watch temperature does not exceed 50° C.

NOTE ON POWER SUPPLY

- This watch is provided with a rechargeable battery for exclusive use with the watch. Unlike conventional battery-powered watches, therefore, battery replacement is not necessary.
- The solar cell is a clean energy source, having no adverse effect on the natural environment.

CAUTION

- Never insert a conventional silver oxide battery in your watch as it may explode, generate an intense heat or catch fire. The watch is so designed that even if the battery is installed in the watch, the watch will not operate.


ROTATING BEZEL

- The rotating bezel can show up to 60 minutes of elapsed time.

- 1 Turn the rotating bezel to align its " mark with Minute hand.



- 2 Read the number on the rotating bezel that Minute hand points to.



* The rotating bezel turns only counterclockwise for safety's sake.

PRECAUTIONS FOR DIVING

for Diver's Watch model

Before diving

Check that:

- the watch operates normally.
- the second hand is moving at 1-second intervals. If it is moving at 2-second intervals, do not use the watch for diving. (For recharging the watch, see "HOW TO CHARGE AND START THE WATCH")
- the time and date are properly indicated.
- the rotating bezel turns counterclockwise smoothly (the rotation must not be too loose or too tight) and the " mark aligns with the minute hand.
- the crown is locked tightly in place.
- there are no visible cracks in the crystal or the watch band.
- the strap or bracelet is securely fastened to the watch case.
- the buckle or clasp keeps the strap or bracelet firmly secured to the wrist.
- the metal bracelet is sized to fit your wrist if your watch has it.

If there are any malfunctions, we recommend that you contact an AUTHORIZED SEIKO DEALER before using the watch.

While diving

- While you are underwater, never unscrew the crown or pull it out.
- Take care not to hit the watch against hard objects such as rocks.
- Bezel rotation may become slightly harder in the water but this is not a malfunction.

After diving

- After making a dive, be sure to rinse the watch in fresh water, and wash out all seawater, soil, sand, etc.
- After cleaning the watch in fresh water, be sure to wipe it thoroughly dry to prevent possible rust on the case.
- To maintain the excellent water resistant quality of the watch, we recommend that you have the watch overhauled and that you have the gaskets for case back and crown replaced by an AUTHORIZED SEIKO DEALER periodically.

SPECIFICATIONS

- | | | |
|---|------------------------------------|--|
| 1 | Frequency of crystal oscillator .. | 32,768 Hz (Hz = Hertz ... Cycles per second) |
| 2 | Loss/gain (monthly rate) | ±20 seconds at normal temperature range (5° C ~ 35° C) (41° F ~ 95° F) |
| 3 | Operational temperature range .. | -5° C ~ +50° C (23° F ~ 122° F) |
| 4 | Driving system | Step motor |
| 5 | Power supply | Titanium-lithium ion rechargeable battery |
| 6 | Duration of life | |
| | Full charge | Approx. 6 months |
| | 2-second interval operation .. | Approx. 3 days |
| 7 | Additional function | Instant-start function, energy depletion forewarning function and overcharging prevention function |
| 8 | IC (Integrated Circuit) | C-MOS-IC, 1 piece |

* The specifications are subject to change without prior notice for product improvement.

TO PRESERVE THE QUALITY OF YOUR WATCH

WATER RESISTANCE

Indication on case back	Condition of use Degree of water resistance*	Accidental contact with water such as rain and splashes	Swimming, yachting and taking a shower	Taking a bath and shallow diving	Scuba diving**
No indication	Non-water resistant	No	No	No	No
WATER RESISTANT	3 bar	Yes	No	No	No
WATER RESISTANT 5 BAR	5 bar	Yes	Yes	No	No
WATER RESISTANT 10/15/20 BAR	10/15/20 bar	Yes	Yes	Yes	No
DIVER'S 200 M	20 bar	Yes	Yes	Yes	Yes

Non-water resistant

- If the watch becomes wet, have it checked by an AUTHORIZED SEIKO DEALER or SERVICE CENTER.

Water resistant 5/10/15/20 bar

- Before using in water, be sure the crown is pushed in completely.
- Do not operate the crown when the watch is wet or in water. If used in sea water, rinse the watch in fresh water and dry it completely.
- Do not operate the crown when the watch is wet with soapy water or shampoo.
- If the watch is left in warm water, a slight time loss or gain may be caused. This condition, however, will be corrected when the watch returns to normal temperature.

* Pressure in bar is a test pressure and should not be considered as corresponding to actual diving depth since swimming movement tends to increase the pressure at a given depth. Care should also be taken on diving into water.
** Do not use the watch for saturation diving.

TEMPERATURES



Your watch works with stable accuracy within a temperature range of 5° C and 35° C (41° F and 95° F).
Temperatures over 50° C (122° F) or below -5° C (+23° F) may cause a slight time loss or gain or shorten the duration within which the watch keeps operating.
However, the above conditions will be corrected when the watch returns to normal temperature.

MAGNETISM



Your watch will be adversely affected by strong magnetism. Keep it away from close contact with magnetic objects.

CHEMICALS



Be careful not to expose the watch to solvents, mercury, cosmetic spray, detergents, adhesives or paints. Otherwise, the case, bracelet, etc. may become dis-colored, deteriorated or damaged.

PRECAUTION REGARDING CASE BACK PROTECTIVE FILM



If your watch has a protective film and/or a sticker on the case back, be sure to peel them off before using your watch.

CARE OF CASE AND BRACELET



To prevent possible rusting of the case and bracelet, wipe them periodically with a soft dry cloth.

SHOCKS & VIBRATION



Be careful not to drop your watch or hit it against hard surfaces.

PERIODIC CHECK



It is recommended that the watch be checked once every 2 to 3 years by an AUTHORIZED SEIKO DEALER or SERVICE CENTER to ensure that the case, crown, gasket and crystal seal remain intact.