

**SEIKO**

**QUARTZ**

**4004  
(Cal.0903A)**

**PARTS LIST**


Calibre No.

**0903A**

Jewels

**0j**

Style Name

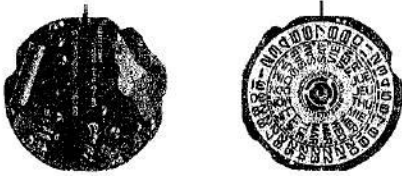**QUARTZ 4004****Characteristics**

Casing diameter: 27.00  $\phi$ mm  
 Maximum height: 5.30 mm  
 Frequency of quartz crystal oscillator: 32,768 Hz  
 (Hz = Hertz . . . . . Cycle per second)  
 Driving system: Step motor system  
 Regulation system: Trimmer condenser  
 Calendar (day & date)  
 Instant setting device for day & date calendar  
 Trilingual change-over system for day of week  
 Second-setting device



122 900



131 900



224 900



225 900



231 900



241 900



261 900



271 900



281 900



354 900



391 900



☆ 400 909



701 900



719 900



735 909



737 900



☆ 801 933



805 900



808 900



810 900



867 900



☆ 870 770



963 501



4000 900



4002 900



4146 900



☆ 4225 900



4239 900



☆ 4264 900



U.C.C.301



☆ 884 740



022 493



022 494



022 451



022 766

3/1

Calibre No.		Jewels	Style Name	
<b>0903A</b>		<b>0j</b>	<b>QUARTZ 4004</b>	
PART NO.	PART NAME	PART NO.	PART NAME	
122 900	Center wheel bridge	963 501	Snap for day star with dial disk	
131 900	Third wheel bridge	4000 900	Circuit block with crystal oscillator & trimmer condenser	
224 900	Center wheel & pinion	4002 900	Coil block	
225 900	Cannon pinion	4146 900	Step rotor	
231 900	Third wheel & pinion	☆4225 900	Holding spring for battery	
241 900	Sweep second wheel & pinion	4239 900	Rotor stator	
261 900	Minute wheel	☆4264 900	Battery connection for plus terminal	
271 900	Hour wheel	U.C.C.301	Silver oxide battery	
281 900	Setting wheel	☆884 740	Holding ring for dial	
354 900	Winding stem	022 493	Third wheel bridge screw	
391 900	Second-setting lever	022 493	Circuit block screw	
☆400 909	Lever for unlocking stem	022 493	Coil block screw	
701 900	Fifth wheel & pinion	022 494	Center wheel bridge screw	
719 900	Day corrector	022 494	Day corrector screw	
735 909	Winding stem holder	022 451	Screw for battery connection and holding spring for battery	
737 900	Date corrector wheel with winding pinion	022 766	Date dial guard screw	
☆801 933	Date dial			
805 900	Intermediate setting wheel			
808 900	Date dial guard			
810 900	Date jumper			
867 900	Day & date driving wheel			
☆870 770	Day star with dial disk (English-French-Spanish)			
☆870 771	Day star with dial disk (English-German-Italian)			
☆870 772	Day star with dial disk (English-Portuguese-Spanish)			
☆870 773	Day star with dial disk (English-Chinese-Roman numerals)			
☆870 774	Day star with dial disk (English-Arabic-Persian)			
<b>Remarks :</b>				
<b>Lever for unlocking stem</b>				
☆400 909..... Used only for one-piece type case.				
<b>Date dial</b>				
☆801 933..... Used when both the crown and the date frame are located at 3 o'clock position.				
If the date dial is required in any other type, specify (1) Cal. No. (2) the crown position (3) the date frame position and (4) Dial No.				
<b>Day star with dial disk</b>				
☆870 770 ~ 4..... Used when both the crown and the date frame are located at 3 o'clock position.				
If the day star with dial disk is required in any other type, specify the number printed on the disk.				
<b>Holding ring for dial</b>				
☆884 740..... Used only for one-piece type case.				
<b>Holding spring for battery</b>				
☆4225 900..... Used only for case without battery hatch.				
<b>Battery connection for plus terminal</b>				
☆4264 900..... Used only for case with battery hatch.				

☆ Please see remarks.

Part numbers in light letters are not shown in photos.

# TECHNICAL GUIDE


## CONTENTS

<b>CHARACTERISTICS AND MECHANISM</b> .....	1
I. SPECIFICATIONS AND FEATURES .....	3
1. Specifications .....	3
2. Features .....	3
II. FUNCTIONING .....	4
1. Structure of the movement .....	4
2. Outline of functioning .....	5
3. Functioning of electric circuit block .....	5
(1) Circuit block .....	5
(2) Oscillator regulating device .....	6
(3) Battery .....	6
4. Functioning of mechanical portion .....	7
(1) Step motor .....	7
(2) Gear train mechanism .....	8
(3) Setting mechanism .....	9
(4) Second setting and reset switch .....	9
(5) Calendar mechanism .....	10
(6) Case construction .....	11
III. RESETTING TIME AND CALENDAR .....	12
1. Resetting time .....	12
2. Resetting calendar .....	12
<b>DISASSEMBLING AND REASSEMBLING</b> .....	13
I. JIGS AND TOOLS FOR REPAIR SERVICING .....	14
II. USE OF JIGS AND TOOLS .....	15
1. Quartz tester .....	15
2. Tester .....	17
III. DISASSEMBLING, REASSEMBLING, LUBRICATING AND CLEANING .....	19
1. Disassembling, reassembling and lubricating .....	19
(1) Disassembling, reassembling and lubricating of calendar mechanism .....	20
(2) Disassembling, reassembling and lubricating of gear train mechanism .....	21
2. Cleaning .....	22

# CERAMIC QUARTZ

**SEIKO**  
QUARTZ

CAL.0903A




<b>CHECKING AND ADJUSTMENT</b> .....	23
CHART .....	24
A. Check output signal .....	26
B. Check battery voltage .....	26
C. Check battery conductivity .....	28
D. Check circuit block conductivity .....	26
E. Check circuit block output terminal conductivity .....	30
F. Check coil block .....	30
G. Check output signal .....	32
H. Check second setting lever .....	32
I. Check gear train condition and calendar mechanism .....	32
J. Check reset condition .....	32
K. Check accuracy .....	32
L. Time accuracy adjusting method .....	34
Testing time accuracy .....	35

## CHARACTERISTICS AND MECHANISM

The SEIKO Quartz Cal. 0903A is a popular crystal oscillator watch that has been developed on the basis of the SEIKO Quartz group now gaining a fine reputation for its high accuracy.

The elements such as the quartz oscillator, MOS IC, and the step motor which constitute the heart of a quartz oscillator watch have been designed to give optimum performance, in keeping with a watch produced through our advanced research and development. Our new manufacturing techniques have resulted in an advanced-type watch which is extremely simple in construction, easily handled for after-servicing and which is available at an attractive price.

Calibre 0903A



Movement



## I. SPECIFICATIONS AND FEATURES

The SEIKO QUARTZ 0903A boasts the following specifications and features.

## 1. Specifications

Item	Cal.	Cal. 0903A
Additional mechanisms		Calendar (day & date) Trilingual change-over system for the day of the week Instant day and date setting Second setting device Electronic circuit reset switch
Crystal oscillator		32,768 Hz (Hz = Hertz . . . . . cycles per second)
Loss/gain		Loss/gain at normal temperature Annual rate: less than 2.5 minutes (Mean monthly rate: less than 15 seconds.)
Case diameter		27.0 mmφ
Height		5.3 mm
Operational temperature range		-10°C ~ +60°C (14°F ~ 140°F)
Driving system		Step motor system
Regulation system		Trimmer condenser
Battery power		Silver oxide battery (J.U.C.C. 301) Capacity 100 mA·H Voltage 1.5V Size 11.6mm x 3.4mm

## 2. Features



- (1) The crystal oscillator generates a stabilized oscillation of 32,768 Hz.
- (2) One-second hand operation system by unique step motor offers high stability.
- (3) Second setting device.
- (4) The instant day and date setting device.
- (5) The trilingual change-over system has been adopted for indicating the day of the week in order to provide more possibilities for the user.
- (6) Low power consumption has succeeded in minimizing the battery size and the movement, giving an attractive appearance to the watch.
- (7) Extensive simplification of the construction permits easy handling and requires no difficult adjustments.
- (8) Time can be easily adjusted by simply turning the trimmer condenser.
- (9) Battery life exceeds one year.

## II. FUNCTIONING

### 1. Structure of the movement

The circular movement consists of a circuit block including a crystal oscillator, coil block, battery, and a mechanical portion of which the main component is a step motor and a

gear train. Since they are formed as individual blocks, each portion can be detached separately, thus simplifying checking and adjustment.

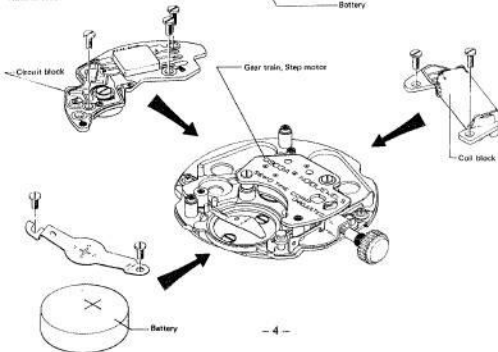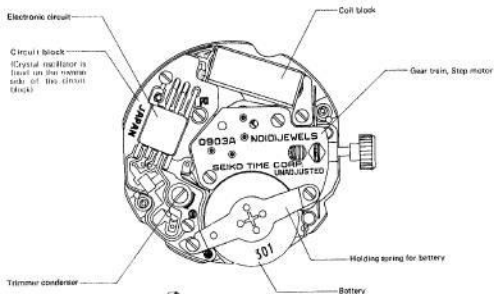


### 2. Outline of functioning

- (1) The crystal oscillator, built in the crystal unit, oscillates accurately at 32,768 Hz.
- (2) The circuit unit receives the 32,768 Hz oscillations (electronic signals) and converts them into impulses at the rate of one per second, i.e., 1/2, 1/2, 1/2, ...
- (3) The one-per-second signals are trans-

mitted to coil block, causing step motor to momentarily rotate once every second in 180° increments.

- (4) This rotation is transmitted to gear train thus moving the hands.

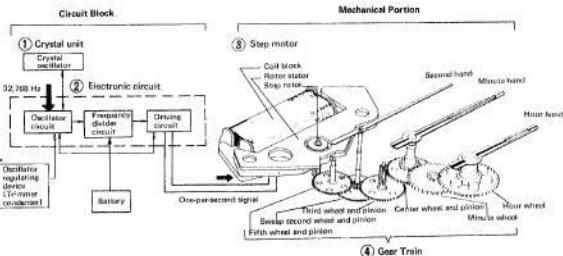


### 3. Functioning of electronic circuit block

#### (1) Circuit block

The crystal oscillator uses the SEIKO ultrasmall tuning fork type and is housed in a flat-type vacuum capsule.

When voltage is supplied from the electronic circuit, the crystal oscillator makes stabilized oscillation accurately at 32,768 Hz which is the source of the high accuracy obtained in Cal. 0903A watch.

A MOS IC of high reliability is used in the electronic circuit. The electronic circuit supplies voltage to the crystal oscillator to cause it to oscillate at 32,768 Hz and at the same time it takes out the oscillation in the



form of an electrical signal. The oscillation of 32,768 Hz is successively divided into 1/2 to finally obtain a signal per second, which is transmitted to the step motor.




## (2) Oscillator regulating device

Adjustment of the oscillator of Cal. 0903A watch can be easily made by simply turning the trimmer condenser.

### • Function of the Trimmer Condenser

The trimmer condenser consists of a rotor electrode and a stator electrode. Turning the shaft fixed to the rotor changes the overlapped area between the rotor electrode and stator electrode, which in turn changes the capacitance of the trimmer condenser. Turning the trimmer condenser changes its capacitance as shown in the diagram. Time is adjusted by the magnitude of this change.

○ Checking accuracy cannot be made with conventional mechanical wrist-watch testers. It is necessary to use the QUARTZ TESTER.



## (3) Battery



The electric source, a silver oxide battery (U.C.C. 301) lasts for more than a year.

The battery maintains constant voltage except when it is near the end of its service life at which time the voltage drops sharply. Therefore, when the watch stops or time keeping becomes inaccurate, the first step is to check the battery.

## 4. Functioning of mechanical portion

### (1) Step motor

One of the features of these watches is the SEIKO step motor which changes the vibrations of the crystal oscillator into a rotating motion. The step motor consists of a coil block, two rotor stators and a step rotor. The rotor stators are made of materials having a high conductivity of magnetic force. The step rotor is a circular-shaped permanent magnet having two alternately imposed N and S poles.

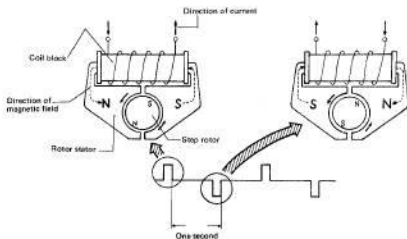

### Operational sequence


- (1) Current flows in the coil block. The current, of which the flow direction is changed once every second, is transmitted from the circuit block into the coil block.
- (2) Rotor stators become magnets. When current flows in the coil block, the two rotor stators become magnets and the tip portions become, respectively, N and S poles.
- (3) Step rotor rotations. The N and S poles of the rotor stator tips and the N and S poles of the step rotor alternately repel and attract

- causing the step rotor to rotate in  $180^\circ$  increments in a constant direction once every second.
- (4) Rotation of the second hand. Rotation of the step rotor is transmitted to the fifth wheel and pinion which gears with the pinion of the step rotor. The rotation of the fifth wheel and pinion is in turn transmitted to the sweep second wheel and pinion which gears with the pinion of the fifth wheel. The rotation of the fourth wheel and pinion is finally transmitted to move the second hand.

## (2) Gear train mechanism

The gear train features a simplified structure which also facilitates servicing. The gear train transmits the torque of the step motor to the indication mechanism.

The rotor rotation of the step motor is transmitted to the fifth wheel, sweep second wheel, third wheel, center wheel, minute wheel and hour wheel.

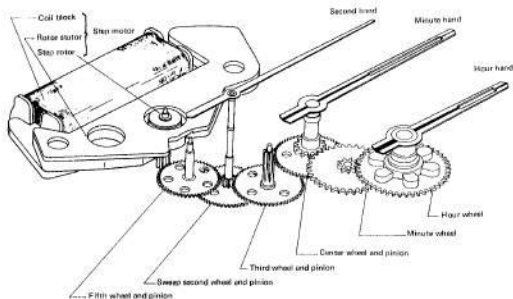

## (3) Setting mechanism

The setting mechanism has a simplified structure developed by SEIKO's advanced technology.

### • Normal position


Free

### • First Click

The date corrector wheel gears with the date dial and day corrector and the date and day of the week can be adjusted in accordance with the direction in which the crown turns.


### • Second Click

The time can be set when the pinion of the winding stem gears with the setting wheel. (The day and date corrector wheel does not rotate on this position.)



## (4) Second setting and reset switch

A unique second hand setting device and a reset switch are provided for SEIKO Quartz watch Cal. 0903A. This enables "to-the-second" setting of the time.

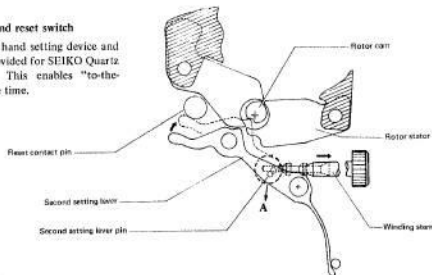

### • Second setting devices

Pulling the crown out to the second click causes the second setting lever pin to be disconnected from the winding stem (marked A) and the rotor cam. The second hand always stops on an even-numbered second (2, 4, 6, etc.).

### • Reset switch

When the second hand stops, the second

setting lever is simultaneously disconnected from the winding stem (marked A) and contacts the reset contact pin thus engaging the reset switch. When the reset switch is in the ON position, the watch movement is stopped.

However, the electric current from the battery flows through the crystal oscillator and the electronic circuit. Then the watch is ready to start.

### (5) Calendar mechanism

(1) Date and day changes as follows.

- Date ..... 23:00 24:00
- Day ..... 24:00 03:15

(2) Calendar and hand setting

Normal position ..... Free


First click ..... Change of day and date

Date change ..... clockwise

Day change ..... counterclockwise

(Day and date can be changed at any time)

Second click ..... Hand setting, reset switch and second setting

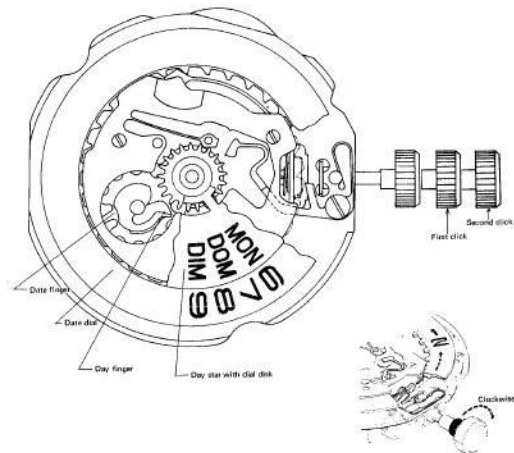

### OPERATION

#### (6) Case construction

Case construction is water resistant.

There are two types of caseback construction. One type is provided with the battery hatch on the case back whereas the other is not.

#### [1] Direction of current flow

Electric current flows from the (+) surface of the battery in the direction shown by the arrow mark (+). The contacting portion of the component parts should therefore be checked for current flow.

#### • The watch without the battery hatch

(Example: Snap type case back construction)

The current flows from the holding spring for battery into the plate.

#### • The watch with the battery hatch

(Example: One-piece type case back construction)

In one type the current flows from the spring for battery connection to the plate through the battery hatch and snap ring. In the other type the current flows from the plus lead terminal to the plate.

#### [2] Anti-magnetic construction

The dial lower plate and back plate are made of special anti-magnetic metal which completely shields the watch from external magnetic fields.

#### How to replace the battery

#### • The watch without the battery hatch


(Example: Snap type case back construction)

The battery can be easily replaced by opening the case back, loosening the screw for holding spring for battery, and then shifting the holding spring for battery.


#### • The watch with the battery hatch

(Example: One-piece type case back construction)

The battery can be easily replaced by simply opening the battery hatch.

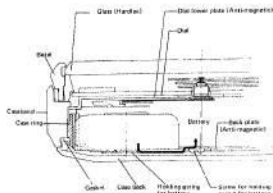

Without the battery hatch  
(Example: Snap type case back construction)



With battery hatch  
(Example: One-piece type case back construction)


#### HOW TO SET THE TIME AND CALENDAR

##### 1. Resetting time

Pull the crown out to the second click and the second hand stops on an even-numbered second (even-number of the dial) (2, 4, 6, etc.).

##### Procedures

- (1) When second hand is at 59-second or 60-second position, pull out the crown to the second click and stop the second hand at 0-second position.
- (2) Turn the crown and set the time of hour hand and minute hand. As the rotation of the gear train is transmitted reversely, the time is set accurately by turning the second hand counterclockwise. Since the calendar changes at twelve midnight, first turn the hands until after 12:00 o'clock to confirm if the day changes, then set the time correctly at a.m. or p.m.
- (3) To synchronize with a time signal, push the crown to the innermost position to start the watch. Then the hour, minute and second hand can be set exactly.



##### 2. Resetting calendar

Pull the crown to the first click.

**Turn the crown clockwise and the date will change.**

Turn the crown counterclockwise and the day of the week will change.

To make the setting correctly, the day of the week should be set before setting the date.

Select the desired language as three languages appear alternatively when setting the day of the week.

If the setting of the calendar is made when the hour hand is pointing to the time between 9:00 p.m. and 3:30 a.m., sometimes the calendar will not change the next day. Please reset the calendar before or after this time period.

## DISASSEMBLING AND REASSEMBLING


For repair servicing, the following SEIKO jigs and tools are necessary.

The following jigs and tools are available at the head office of SEIKO.

- Accuracy tester (Quartz Tester)
- Movement holder
- Movement can
- Holding spring for battery

#### 1. Quartz Tester

Used to check time accuracy (daily rates) and flow of current from circuit block.




#### 2. Tester

Used for checking battery voltage, measuring resistance and conducting conductivity test.



#### 3. Movement holder

Used for disassembling, reassembling, checking and adjusting the movement.



#### 4. Holding spring for battery

Used for securing battery when movement is removed from case or when case back is removed.




#### 5. Others

- (1) Anti-magnetic tweezers for handling step rotor.
- (2) Nonmetallic tweezers for handling battery.

#### 1. Quartz tester

Used for measuring and checking the following:

- Measuring time accuracy
- Checking flow of current from circuit block

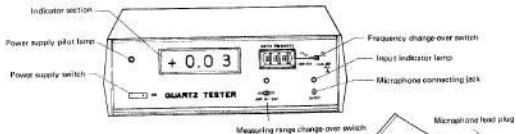


#### (1) Measuring time accuracy (daily rates)

<Preparation>

- [1] Connect power supply cord to electric outlet.


Thirty minutes are necessary to stabilize tester.

(Connecting power supply cord causes crystal in tester to start oscillation).




#### [2] Connect microphone

Insert microphone lead plug in microphone connecting jack of tester.



#### [3] Switch power supply switch to ON position

This will illuminate power supply pilot lamp.



- [4] Set frequency change-over switch
- [5] Set measuring range change-over switch
- Measuring time is ten seconds




<Measurement>

- [6] Place watch on microphone and confirm if input indicator lamp lights at one second intervals.

<Note on positioning watch>

Place watch properly on microphone.

- [7] Read daily rate on indicator section.
- <Note on reading daily rate>
- When daily rate is excessive there will be no indication.
  - The low digit value of 0.01 second sometimes varies, however, this does not indicate a defective condition.
  - Read indicated value after second indication.



Example: 0.03 second fast

- (2) Follow these procedures when checking flow of normal current from circuit block.

<Preparation>

- [1] Connect power supply cord to electric outlet.
- After connecting power supply cord, immediate check can be performed without waiting for stabilization of crystal.
- [2] Connect microphone.
- [3] Switch power supply switch to ON position.

<Checking>



- [4] Place watch on microphone.
- [5] Confirm if input indicator lamp blinks.

## 2. Tester

The tester is used to check battery voltage, to measure resistance and to test conductivity.


(1) Measuring battery voltage

- [1] Set slide switch to (+) DC and rotary switch to DC3V.
- [2] Connect red connector of probe to (+) terminal and black connector to (-) terminal.
- [3] Reading
- Read voltage at DCV, mA300 scale of scale plate.
- Dial indicator shows mA.
- Read voltage calculating 1/100



(2) Measuring resistance

- [1] Set slide switch to (+) DC and rotary switch to R x 100 of OHMS.
- [2] Connect red connector of probe to (+) terminal and connect black connector (-) terminal.



[3] Adjusting 0-ohm

Adjust so that pointer indicates 0Ω by turning Ω adjusting knob while contacting tips of red and black probes.



[4] Reading


Read resistance on OHMS scale of scale plate.  
Read resistance calculating  $\times 100$



(3) Continuity test

[1] Set side switch to (+) DC and rotary switch to R  $\times 1$  of OHMS.

[2] Connect red connector of probe to (+) terminal and connect black connector to (-) terminal



[3] Adjusting 0-ohms

Adjust so that pointer indicates 0Ω by turning Ω adjusting knob while contacting tips of red and black probes.

[4] Reading

Read continuity on OHMS scale of scale plate.

1. Disassembling, reassembling and lubricating

• Disassembling and reassembling

Disassemble watch according to Figs. (1)  $\rightarrow$  (32).  
Reassemble reversing above procedures: Figs. (32)  $\rightarrow$  (1)

Regarding the ► mark in disassembling and reassembling diagrams, refer to items on inspection and adjustment.

• Lubricating

Colored symbols in illustrated figures indicate types of oil, quantities to be applied and lubricating points.


Types of oil

- Moebius A
- ◊ SEIKO Watch oil S-6


Oil quantity

- Liberal quantity
- Normal quantity
- Extremely small quantity

## (1) Disassembling, reassembling and lubricating of calendar mechanism

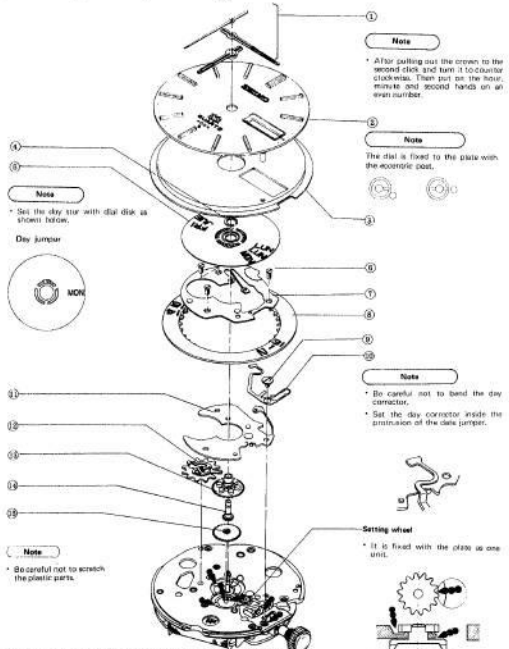



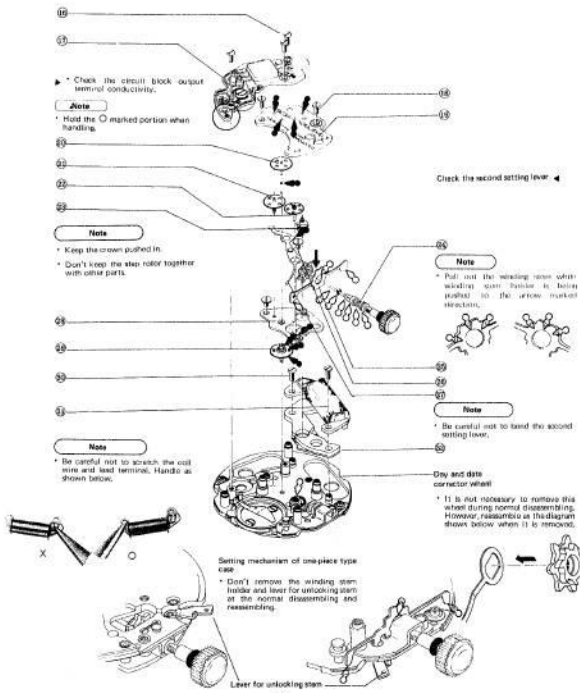

## (2) Disassembling, reassembling and lubricating of the gear train mechanism



## 2. Cleaning


Since several special parts (electronic, plastic parts) used in the SEIKO Quartz watch differ from conventional mechanical watches, use the following cleaning methods when cleaning.



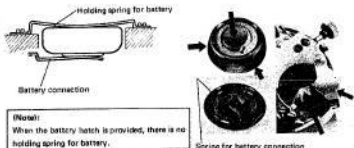
### How to Clean





Name of parts	Cleaning	Drying	Solution	Remarks
(1) Circuit block  Coil block 	DO NOT CLEAN			<b>NOTE:</b> Conducting portion <u>ONLY</u> may be cleaned with a cloth moistened with alcohol or benzine. Dry in <u>COOL</u> air.
(2) Plate  Step rotor 	Rinse or gently scrub with brush	Cool air drying	Benzine	<ul style="list-style-type: none"><li>• Be careful not to remove connected portions of plate.</li><li>• Since step rotor is a magnet, use a clean solution. Any foreign matter which cannot be removed by cleaning should be removed with adhesive tape.</li></ul>
(3) Plastic parts	Rinse or gently scrub with brush	Cool air drying	Alcohol	
(4) Parts other than above	Clean with cleaner, rinse and gently scrub with brush.	Cool or hot air drying	Benzine or trichloroethylene	

## CHECKING AND ADJUSTMENT
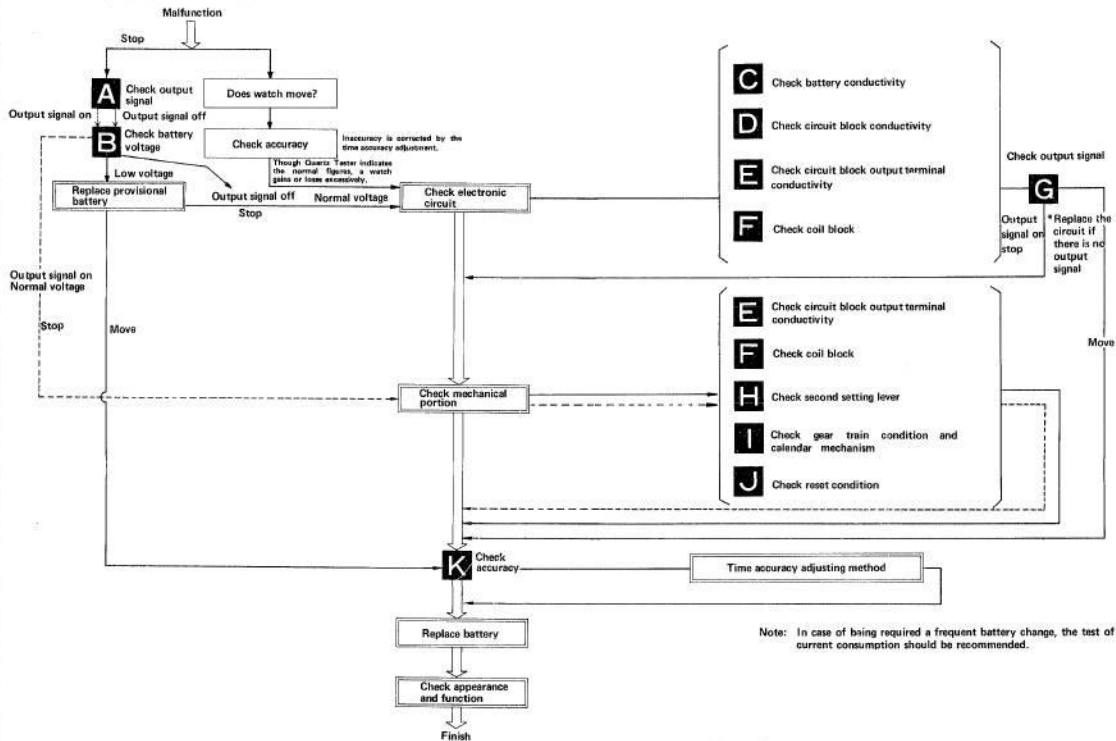
# I. GUIDE FOR CHECKING AND ADJUSTMENT



	Procedures	
<b>A</b> CHECK OUTPUT SIGNAL	<p>Check for output signal</p> <ol style="list-style-type: none"> <li><b>Set Quartz Tester</b> Set Quartz Tester according to procedures described in Handling Methods-(2).</li> <li><b>Checking</b> Check for output signal (Blinking input indication lamp)</li> </ol>  <p>Input indication lamp</p> <p>(Note) Push the crown to the normal position.</p>	<p>One-second blinking —</p> <p>No one-second blinking —</p>
<b>B</b> CHECK BATTERY VOLTAGE	<p>Use following procedures to check battery voltage:</p> <ol style="list-style-type: none"> <li><b>Set tester</b> (Refer to Tester Handling Method) Range to be used DC 3V</li> <li><b>Measuring</b> <ul style="list-style-type: none"> <li>Probe Red (+)</li> <li>..... Battery surface (+)</li> <li>Probe Black (-)</li> <li>..... Battery surface (-)</li> </ul> </li> </ol>  <div data-bbox="94 543 305 611" style="border: 1px solid black; padding: 5px;"> <p>(Note): When handling battery, use non-metallic tweezers or fingernail.</p> </div>	<p>More than 1.5V indicates —</p> <p>Less than 1.5V indicates —</p>
<b>C</b> CHECK BATTERY CONDUCTIVITY	<p>Use following procedures to check if battery current flow to circuit is normal.</p> <ol style="list-style-type: none"> <li><b>Make sure that the battery holding screw is tightened firmly.</b> Third wheel bridge side Circuit board side</li> <li><b>Check the connecting point of the battery, holding spring for battery, battery connection and holding spring for battery for stain.</b></li> </ol>  <p>Holding spring for battery</p> <p>Battery connection</p> <p>Spring for battery connection</p> <div data-bbox="87 927 305 979" style="border: 1px solid black; padding: 5px;"> <p>(Note): When the battery latch is provided, there is no holding spring for battery.</p> </div>	<p>No loosened screws —</p> <p>Loosened screws —</p> <p>Uncorroded —</p> <p>Corroded —</p>

Results	Adjustment and Repair
	<p>Proceed with <b>B</b></p>
	<p>In case of O or in case of X of <b>A</b> check mechanical portion <b>A</b> check electronic circuit</p> <p>Replace with provisional battery.</p> <p><b>K</b></p> <ul style="list-style-type: none"> <li>* If it operates after battery replacement, proceed to accuracy test.</li> <li>* If it does not operate after battery replacement, proceed to electronic circuit test.</li> </ul>
	<p>Proceed with <b>C</b> 2.</p> <ul style="list-style-type: none"> <li>* Tighten screws</li> </ul> <p>Proceed with <b>C</b> 3.</p> <ul style="list-style-type: none"> <li>• Carefully wipe off any contamination on battery connecting surfaces, holding spring and connectors. (Refer to Cleaning Method).</li> </ul> <p>Note: Be careful not to damage any connection for battery.</p> 


Procedures

3. Check contact of battery connection and battery connection pin.

• Set tester

(Refer to "Tester Handling Method, Page 5")  
(Range at OHMS R x 100)

- Apply the red and the black lead probes of the tester to the battery connection and the battery connection pin respectively.



Less than 10 Ω

More than 10 Ω

Results



Proceed with **D**

- Tap on the battery connection pin if it is not connected properly with battery connection.



Adjustment and Repair

C


CHECK BATTERY CONDUCTIVITY

D


CHECK CIRCUIT BLOCK CONDUCTIVITY

Check for short circuit and defective contact of circuit block conducting portion.

1. Check the three screws in the diagram below for looseness.



2. Check for short circuit, the disconnection of soldered portion and lead pattern and foreign matter on the contacting surface of the circuit block screws.



1. Check the arrow marked portion for disconnection of soldered portion and short circuit.

2. Check the disconnection of circuit block.
3. Check the stain on the screws.

No loosened screws

Loosened screws

No mark for 1, 2 and 3

Any mark for 1, 2 and 3

Proceed with **D** 2.


- Retighten screws

Proceed with **E**

- Replace the circuit block if marked 1 and 2.
- Wipe off the stain if marked.

## Procedures

1. Check the circuit output terminal for short circuit.



Short circuit is resulted from the output terminal deformation.


2. Check the rigid contact with the coil lead terminal.



Normal condition

The output terminal is not connected with the coil lead terminal.

3. Remove circuit block and check for any contamination on the output terminal and coil lead terminal.



Uncontaminated

Contaminated

Remove circuit block to check the breaking of coil wire and short circuit.

- \* Set tester  
Range at OHMS R x 100
1. Touch probes of tester to two terminals (a and b) of coil, respectively.



(a) (b)

1.5 KΩ-3.5 KΩ

Less than 1.5 KΩ

More than 3.5 KΩ

(Note)

Be careful to avoid breaking coil wire. Hold coil block as shown in photo.

## Results



Process with **E** 2.

- Correct the bend of terminals with tweezers.



Process with **E** 3.

- Correct the bend of circuit output terminals with tweezers.



Process with **F**

Wipe off the contamination on terminal.











In case of **Checking Electronic Circuit** proceed with **G**  
In case of **Checking Mechanical Partion** proceed with **H**

Short circuit  
Broken wire

- Replace coil block  
Unscrew the coil block screws (2 pcs.) with third wheel bridge.  
The coil is removed by reversing the main plate.




		Procedures	
G CHECK OUTPUT SIGNAL		<p>Check the output signal.</p> <ol style="list-style-type: none"> <li>1. Set Quartz Tester</li> <li>2. Check</li> </ol> <p>Check with the same procedures of <b>A</b></p>	<p>One-second blinking _____</p> <p>No one-second blinking _____</p>
		<p>Check if the second setting lever is making contact with the gear train.</p> <ul style="list-style-type: none"> <li>• When the crown is at the normal position and first click.</li> </ul> <ol style="list-style-type: none"> <li>1. Check to be sure that the second setting lever, rotor cam, third wheel and pinion, fourth wheel and pinion and fifth wheel and pinion are turning horizontally and that they are flush with each other. (Check the clearance at the arrow marked portion.)</li> <li>2. Check to be sure that the second setting lever moves exactly when the crown is pulled out to the second click.</li> </ol>	<p>Not attach _____</p> <p>Attach _____</p> <p>Between reset contact pin and second setting lever. No clearance _____</p> <p>Clearance _____</p>
H CHECK SECOND SETTING LEVER			
		<p>Check gear train condition and calendar mechanism.</p>	<p>Normal _____</p> <p>Defective _____</p>
I		<p>Check the reset condition after the circuit block is assembled.</p> <ol style="list-style-type: none"> <li>1. Check if the second hand stops exactly on the second click and if it starts promptly one second after the crown is returned.</li> <li>2. Check the tightness of the circuit block screw.</li> <li>3. Check for disconnection and foreign matter on the reset circuit block on the reset and circuit block.</li> </ol>	<p>Stops completely and starts moving after one second. _____</p> <p>Does not stop or move irregularly. _____</p> <p>No loose screws _____</p> <p>Loose screws _____</p> <p>No disconnection and foreign matter _____</p> <p>Disconnection and foreign matter _____</p>
			
J CHECK RESET CONDITION		<p>Check gain and loss of time accuracy.</p> <ol style="list-style-type: none"> <li>1. Set Quartz Tester</li> </ol> <p>(Refer to Quartz Tester Handling Method)</p>	<p>Normal _____</p> <p>Defective _____</p>
K CHECK ACCURACY			

Results	Adjustment and Repair
	<p>Proceed with <b>K</b></p> <p>Check mechanical portion <b>H</b></p> <p>Replace the circuit block.</p>
	<p>Proceed with <b>H</b> 2.</p> <p>Repair the defective portion.</p>  <p>Proceed with <b>I</b></p> <ul style="list-style-type: none"> <li>• Lubricate.</li> <li>• Check the shape of the second setting lever spring, and correct if bent.</li> </ul>
	<p>Proceed with <b>J</b></p> <ul style="list-style-type: none"> <li>• Repair the defective portion.</li> </ul>
	<p>Proceed with <b>K</b></p> <p>Proceed with <b>J</b> 2.</p> <p>Proceed with <b>J</b> 3.</p> <p>Retighten the screws.</p> <p>Proceed with <b>K</b></p> <ul style="list-style-type: none"> <li>• Replace the circuit block if disconnected, and wipe it clean if dirty.</li> </ul>
	<p>Replace the battery</p> <p>Adjust time accuracy</p>

Time accuracy is adjusted by turning the trimmer condenser.

The watch gains or loses according to the direction in which the trimmer condenser is turned. Adjustment should therefore be made after ascertaining by the Quartz Tester whether the watch tends to gain or lose.



- Note for handling of Trimmer Condenser.  
Avoid excessive depressing and turning the trimmer condenser.

### TESTING TIME ACCURACY

The time accuracy test is made with the Quartz tester. When testing with the Quartz tester, there will be a slight difference between the tested time and actual time accuracy as the room temperature and the watch temperature on the wrist are not the same.

For example, when the room temperature is 25°C, the Quartz tester will show plus figures, because the watch is so designed that it maintains high accuracy at the temperature on the wrist which is generally 30°C.

The watch's accuracy is less than 15 seconds per month, or this can be calculated less than 0.5 seconds per day. Therefore, even when the tester indicates an excess of plus 0.5 seconds, because the actual time accuracy will be slightly less than that indicated by the tester when worn on the wrist, it will be within the average tolerance.

Quartz watches displayed in illuminated show cases will have a higher temperature. When tested with the Quartz tester, the figures may not be stable. Therefore, it should be read after the temperature of the watch becomes stabilized.

