


# Operation Guide 5185

CASIO®

- Your watch may differ somewhat from the one shown in the illustration.

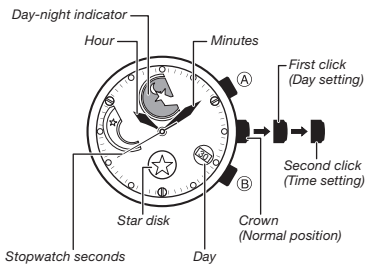

- The day-night indicator performs one rotation every 24 hours. A day sky image is shown during the day and a night sky image is shown at night.
- The star disk at 6 o'clock rotates clockwise, one step each second.

**To set the time**

- Pull out the crown to the second click.
  - This will cause rotation of the star disk (at 6 o'clock) to stop.
- Set the hands by rotating the crown. Move the minute hand four or five minutes past the time you want to set, and then back it up to the proper setting.
  - Carefully set the time, making sure to distinguish between AM and PM.
- Push the crown back in to the normal position to restart timekeeping.
  - This will cause rotation of the star disk (at 6 o'clock) to restart.

**To set the day**

- Pull out the crown to the first click.
- Set the day by rotating the crown.
- Push the crown back in to the normal position.
  - Avoid setting the day between 9:00 p.m. and 1:00 a.m. (the day display may not change in the following day).

**Using the Stopwatch**

The stopwatch lets you measure elapsed time up to 59 seconds. You can also correct the position of the stopwatch second hand when necessary.

**To measure elapsed time**

- Press (A) to start the stopwatch.
- Press (A) to stop the stopwatch.
  - You can resume the measurement operation by pressing (A) again.
  - The illustration above shows an elapsed time of 40 seconds.
- Press (B) to reset the stopwatch.

**Notes**

- The stopwatch second hand will continue moving until you stop it. Be sure to stop and reset the stopwatch after you are finished using it. Leaving the stopwatch running will run down the watch's battery.


**Adjusting the Stopwatch Second Position**

Use of the stopwatch can cause the starting position of the stopwatch second hand to become misaligned. Use the following procedure to check hand alignment and to adjust the position of the hand so it points to 12 o'clock when the stopwatch is reset.


**To adjust the position of the stopwatch hand**

- Press (B) to reset the stopwatch, and check the alignment of the stopwatch second hand.
- Pull out the crown to the second click.
- Press (A) to move the stopwatch second hand forward until it points to 12 o'clock.
- Push the crown back in to its normal position.
  - Note that pulling the crown out also stops the timekeeping hour and minute hands. After performing the above procedure, you should also adjust the timekeeping setting.

- For a watch with an elapsed time bezel  
Rotate the elapsed time bezel to align the ▽ mark with the minute hand.  
After that, you will be able to determine how much time has elapsed since you adjusted the bezel position by checking the bezel value that the minute hand is currently pointing to.



- Some water resistant models are equipped with a screw lock crown.
- With such models, you must unscrew the crown in the direction noted in the illustration to loosen it before you can pull it out. Do not pull too forcibly on such crowns.
- Note that a screw lock crown watch is not water resistant while its crown is loose. Be sure to screw the crown back in as far as it will go after configuring settings.



## Specifications

**Accuracy at normal temperature:** ± 20 seconds a month

**Display:** 3 analog hands (timekeeping hour and minutes, stopwatch seconds),  
Day-night indicator, day

**Stopwatch function:** Measuring capacity: 59 seconds/Measuring unit: 1 second  
Measuring mode: Elapsed time

**Battery:** One silver oxide battery (Type: SR626SW)  
Approximately 2 years on type SR626SW (assuming one stopwatch operation 60 minutes per day)